


How to assemble the ReLeaf™ Antenna Stand

Don't throw your box away, make use of it!

Cut on the solid lines and fold on the dotted ones to create an antenna tripod, complete with a notch for your coaxial cable in the rear.

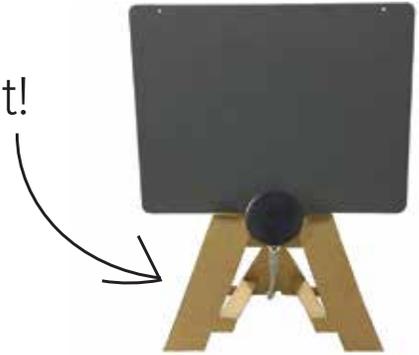

Step 1: Cut on the Solid Lines

We recommend using a box cutter or utility knife for the best results. Be careful not to cut the dashed lines!




Step 2: Fold the Top Tabs

These tabs will support the antenna. Fold them toward you about 90 degrees.



Step 3: Fold the Back Leg

This is the shape you cut out in the middle of the pattern resembling an uppercase "A". Use the dashed line under the Mohu logo as the fold line and fold the "A" shape back so that the antenna stand can stand up on its own like a tripod.

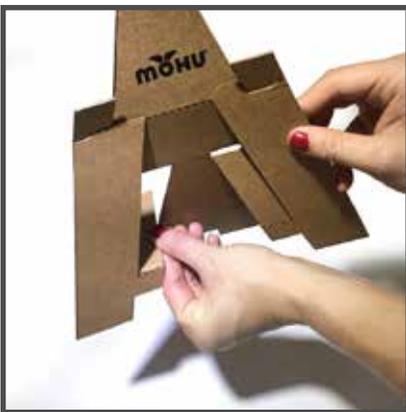

Step 4: Fold the Leg Supports

On the inside of the outer legs are long tabs, which act as braces, holding the front and back legs together and providing stability. Fold these leg supports back 90 degrees against the dotted lines so that they are pointing toward the back leg.



Step 5: Lock the Leg Supports

On the sides of the "A"-shaped back leg you will have cut horizontal slits. The leg supports you just folded back should fit snugly into these slits. Attach near the very end of the support tabs, so that the back leg is distanced as far as possible from the front legs, for the best stability.



Step 6: Fold the Cable Notch

Finally, fold the small tab in the bottom of the back leg back, against the dotted line, making room for the coaxial cable to protrude from the rear. Then just rest the Antenna on the top tabs, guide the coaxial cable through the notch, and enjoy free TV!